

TECHNICAL SPECIFICATION

hushphone HUS-BX-018

OFFICE PHONE CALLS HAVE NEVER BEEN SO COMFORTABLE

Modern workplaces are adapting to the needs of the people who perform their jobs in them. Providing special zones for phone calls and videoconferences has become one of the crucial elements of an office that is friendly and open to the needs of employees. The best solutions should be flexible and inexpensive to implement, and this is exactly what we provide.




DIMENSIONING




1

W/D/H: exterior 1000 x 900 x 2230 mm
interior 780 x 827 x 2010 mm


Weight: 316 kg **Weight with crate:** 423 kg
Logistic data is available on request.

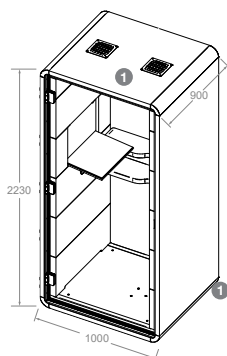

1 Power cable access



2 Stool (optional)



3 Preparation for the stool assembly



ELECTRIFICATION


LED ceiling light.

Power module: 1x power, 2x USB Type A 2.4A.

Motion sensor: activating lighting and airflow at 100% power. Located under the rear shelf. Standby power consumption 0.3 W.

Maximum power consumption of the product 7 W.

Power cable: access from ceiling or base (detailed information can be found in the Assembly Manual). 60 mm milling prepared from the inside of the ceiling (not visible from outside). White cable with three-prong grounded plug 230V. The total length of the cable – 4500 mm. The cable length for the exit of unit – 3600 mm.

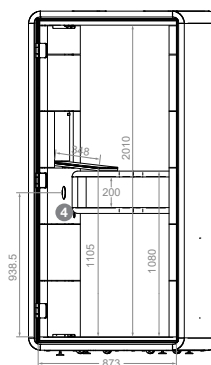

4 Power module



LIGHTING


Ceiling light 2.5 W/160 lm. 4000 K. Avg. [lux] 32. Min. [lux] 29 Max. [lux] 34.*

* Calculation results of the LED light source on the tabletop inside the booth.
The final amount of Lux depends on the lighting intensity in the office space.



VENTILATION

2 fans. 110 m³/h* / 80 seconds**.



* maximum performance of the single fan, taking into account losses in the ventilation system.
** total time of air change inside based on the volume and capacity of one fan.



hushoffice

Manufacturer: Fabryka Mebli Biurowych Mikomax sp. z o.o. | 93-231 Lodz ul. Dostawcza 4, Poland
Distributor: Mikomax sp. z o.o. | 93-231 Lodz ul. Dostawcza 4, Poland

hushoffice.com

TECHNICAL SPECIFICATION

hushphone HUS-BX-018



EXTERIOR

GLASS DOOR with LATCH HANDLE: acoustic, tempered and laminated safety glass 10 mm, 5.5.2 thickness including the thickness of 5 mm glass, 2 mm acoustic sheet and 5 mm glass. Clear color.

REAR SIDE GLASS PANELS: acoustic and laminated glass 10 mm (RW= 35 dB), 5.5.2 thickness including the thickness of 5 mm glass, 2 mm acoustic sheet and 5 mm glass. Placed in aluminum profiles with acoustic seal. Clear color. Frosted rear glass – optional.

The door is always equipped **with anti-collision marking**. Exact dimensioning is available on request.

PROFILES: for glass and door frame in cosmos grey color.

DOOR HANDLE AND HINGES: anodized aluminum or aluminum painted in cosmos grey color.

CASE: 3-layer honeycomb board with a thickness of 38 mm. Both sides covered with melamine and finished with ABS edging.

Integrated castors with levelling feet.



INTERIOR

Side FOLD-AWAY LAPTOP TABLE (with leather handle). Dimensions: 468 x 348 mm. Opened from the side wall. Made of natural veneer, melamine or non-finger laminate. Maksimum load – **3 kg**.

Ergonomic MDF tapered **REAR SHELF:** 780 x 154-214 x 276 mm. Maximum load on the upper shelf – **10 kg**. Maximum load on the lower shelf – **5 kg**.

STOOL (optional): Base made of steel, powder in cosmos grey color. Column adjustment range: 250 mm. Min. height 630 mm. Max. height 880 mm. Footrest integrated with the column. Seat frame made of LDF. Upholstered with the use of 450 mm foam layer. Maximum load **100 kg**.

INTERIOR PANELS: high-density LDF (HDF) 3 mm thickness, covered with non-flammable polyurethane foam. Upholstered.

FLAME RETARDANT FOAM: complies with BS 5852: Part 2: 1982, Ignition source 5 (Crib 5).

UPHOLSTERY Wool:

weight: 325 g/m², **composition:** 70%WO, 20%PL, 5%PA, 5%AF, **flammability:** cigarette and match (BS-EN 1021-1, 2) (BS 5852-0, 1), CAL 117 (class 1), ASTM 84 (class 1), **light fastness:** 5 (EN ISO 105B02), **fastness to rubbing:** wet: 4/5; dry: 4/5 (ISO 105-X12), **abrasion resistance:** 100.000 martindale cycles (EN ISO 12947-2).

UPHOLSTERY Petrus:

weight: 389 g/m², **composition:** 100%PL, **abrasion resistance:** 80.000 martindale cycles (EN ISO 12947-2), **light fastness:** 3-4 (EN ISO 105B02).

UPHOLSTERY Haiti:

weight: 220 g/m², **composition:** 100%PL, **abrasion resistance:** 100.000 martindale cycles (EN ISO 12947-2), **pilling fastness:** 5

INTEGRAL CARPETED FLOOR.

CARPET: complies with ASTM D2859 – 16 (2021), standard test method for ignitability characteristics of finished textile floor covering materials. Adapted to commercial intensive use (hotel room, hotel suite, boutique, shop, restaurant, conference room, high traffic office, reception, stairs). Graphite color.



ACOUSTIC RATING

Frequency range 125 Hz to 8000 Hz according to ISO 23351-1:2020. Speech level reduction – D_{sA} 26.9 (dB).



SUSTAINABILITY

Hushoffice booths are manufactured in a ISO 9001 and 14001 certified production facility in Poland by Mikomax Smart Office. They are compliant with the ISO 14001 Environmental Management System Standard. Hushoffice is packed and delivered in light cardboard boxes which are recycle-friendly.



CERTIFICATION



Warranty



Made in EU



Premium wool
CAL 117



Certificates



hushoffice

Manufacturer: Fabryka Mebli Biurowych Mikomax sp. z o.o. | 93-231 Lodz ul. Dostawcza 4, Poland
Distributor: Mikomax sp. z o.o. | 93-231 Lodz ul. Dostawcza 4, Poland



hushoffice.com