Kameleon K2

PRODUCT INFORMATION








All **KAMELEONS** have reversible opening doors

The door opening direction for all Kameleon booths can be switched just by rotating the frame during installation. The door handle is made from painted stainless steel. All glass panels are mounted on aluminium frames. All metal parts are powder coated with a special antimicrobial coating.

Door orientation | Door handle

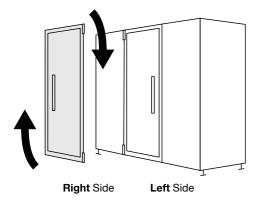


Floor



Sound absorbing polyamide carpet. The colour of the carpet always comes in Melange grey.



Glass



Acoustic Laminated Glass 12mm thick acoustic laminated glass with acoustic foil ensures high soundproof performances. The acoustic interlayer also helps retain broken glass fragments if the glass is broken, reducing the risk of

Add-ons







Seismic Kit

Room Booking





Sprinkler Kit

Door Closer

Table | Socket



All tables are made from pine plywood and laminated with antimicrobial HPL in White or Black satin finish.


2 x Power outlet

2 x USB Type A charger 2 x CAT6 Ethernet socket

Available for:

⊕EU ∴UK ∴AUS ∵USA

Lighting | Ceiling





The ceiling is always covered in Dark grey Acoustic PET Felt panels made from 100% recycled polyester fiber. The overhead LED Light ensures enough light for common activities in a K2 phone booth.

Integrated LED Spot Light Power usage per LED: 3.8W Input: 12V Lumen output: 345 lumen Color Temperature: 3000K Color Rendering Index: 83

Digital Tools



Online Configurator

Personalize every part of your pod according to your needs. With more than 10000 options available, we did our best to ensure you can customize your acoustic booth to fit perfectly in your space. Every configuration can be easily shared.



Augmented Reality

You can virtually insert your 3d configuration in your office space using our AR button from our Online Configurator.

(Available only for iOS for the moment.)




Interchangeable panels between **KAMELEONS**

Fabrics used in our products have OEKO-TEX STANDARD 100 label and are EU Ecolabel certified. Acoustic felt has emission class A+ and VOC (France) A+. Plywood and other composite materials used are CARB 2 compliant and have emission class E1. Foams used in our products certified by and conform to the CertiPUR standard. Acoustics foams have OEKO-TEX STANDARD 100 label. WOOD GLUE: M1 Emission Classification certification. All wood FSC / PEFC certified.

Chipboard + Fabric

Chipboard + Melamine

Exterior Back Panel



Acoustic Felt + Fabric



hipboard + Vene



Cork Pinboar

Exterior Panel





Vertical Round (





Felt + Fabric Chipboa

1



ard + Veneer





Cork Pinboard

Interior Panel





Acoustic Felt - Dark gr

Acoustic Felt + Fabr

Ionized air in all **KAMELEONS**

Air Ionizer






Ventilation grilles are placed at the ground, as well as at the ceiling level. The one from the ground level pushes fresh, filtered air, while the one from the ceiling level removes stale air.


The motion sensor activates the light and fans. After you leave the cabin, the ventilation keeps working for 15 more minutes, ensuring that all the air inside is fresh. The fans come adjusted at 100%, but they can be set to 60% and 75% as well. The air inside the booth is totally replaced, filtered and ionized every 68 to 100 seconds (depending on the pod size).

Air Ionizer

All Kameleon come standard equiped with Air Ionizer.

To improve the quality of the air inside the booth and implicitly ensure better health for its users in the long term, all Kameleons come standardly equipped with Air Ionizer, mounted on the ventilation system. Ionizers are particularly important for the quality of the air, as they neutralise odours and have a beneficial effect on the environment. Even if they are invisible particles, the negative ions have a very pleasant, refreshing effect, comparable to the experience of the air after a summer rain or the air in a fascinating country side area, untouched by the modern pollution.







Fabrics for Interior & Exterior panels

E10 LDS84



Chipboard + Melamine for Exterior panels



Chipboard + Veneer for Exterior panels —



Special Finishes for Exterior panels



Acoustic Felt for Interior panels -



Green Wall for Exterior panels

Z02 Birch

Plywood for Exterior panels



Spring Green

Carpet



Grey


Antimicrobial HPL for Table tops -



Antimicrobial Coating for Metal parts





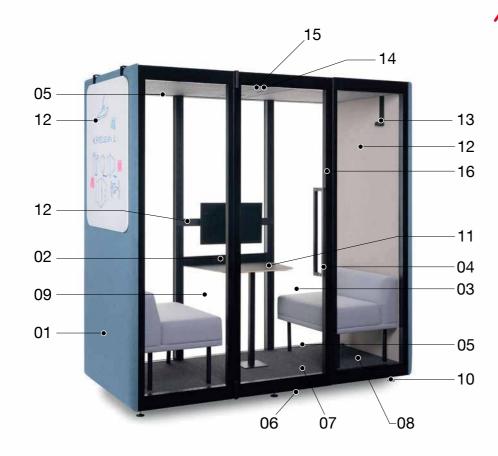

01 Exchangeable exterior panel

You can choose new panels from a variety of shapes, finishes and colours which are available to view in our online configurator or in AR.

02 Connectivity

- 1 Power sockets 230V, 50Hz, max 10A 2 USB Type B chargers
- 1 CAT6 Ethernet sockets

03 Solid Back Panel

You can opt out for a Solid Back panel instead of the Acoustic Laminated Glass.

04 Left / Right Reversible opening door

When you install the frame, you can choose the door opening direction by turning the booth around and switching around the Door Panel and the back Glass Panel.

05 Airflow inlet & outlet

Our ventilation system is performant through its high efficiency and very silent fans.

06 Power and ethernet outlets

The power supply and ethernet outlet can be easily connected at the bottom. Each booth comes equipped with a 5m power cord.

07 Ionized and Purified air

The air pushed into the cabin is first filtered and then sanitized with an air ionizer.

08 Tufted polyamide carpet

Soft carpet with a high level of comfort and higher noise insulation impact.

09 Acoustic Laminated Glass

12mm tick acoustic laminated glass ensures high soundproof performances.

10 Levelers + Wheels

All Kameleon booths come equipped with wheels and leveling feet. Whenever you want to move your booth, you can do it very easily.

11 Interchangeable interior panel

You can choose from a variety of finishes and colours through our online configurator. If you want to get other finishes, the panels can be easily changed.

12 Table tops

All table tops are made from pine plywood and laminated with antimicrobial HPL.

13 Add-on accessories

To ease your work, we have designed some accessories. They can be ordered all together or separately.

14 LED light

The overhead warm LED Lighting ensures enough light for common activities.

15 Motion sensor

The motion sensor activates the light and fans. After you leave the cabin, the ventilation stays on for 15 more minutes, making sure that all the air inside is fresh.

16 Magnetic Lock System

The magnetic lock system makes the daily usage more comfortable. The rubber gaskets help seal the door thus minimizing the noise coming from outside.

Kameleon K2 | Options

SO11

SO12












Tribut Bar stool





Tribut Bar stool + Cushion






TO1






TO2










Exterior Hanganging Whiteboard





Exterior Hanganging Pinboard





VESA Adapter






Coat Hange





Kameleon K2 | Technical Data



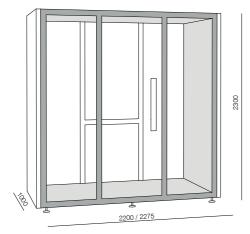


K2 is perfect for small meetings or important private conversations without disturbing others in the office and vice versa.

Dimensions	Exterior W 2200 D 1000 H 2300 (18mm Exterior Panels)
	Exterior W 2275 D 1000 H 2300 (55mm Exterior Panels)
	Interior W 2066 D 976 H 2020
Weight	609.8 kg
	Weight with crate 695.4 kg / 799.5 kg*
Glass Door	Laminated tempered glass 12mm
	Glass Door with frame W 800 D 85 H 2195
	Door Opening W 698 H 2020
	Reversible opening Left & Right
	Magnetic closing door
Glass Walls	Laminated tempered glass 12mm
Interior Panels	Acoustic PET Felt Dark grey
	Acoustic PET Felt Dark grey with various fabrics and color options
Exterior Panels	Round Horizontal, Round Vertical & Round Corners 55mm
	Acoustic Felt + Fabric 18mm
	Chipboard + Fabric 18mm
	Chipboard + Melamine, Chipboard + Veneer 18mm
	Plywood 18mm
	Whiteboard 18mm
	Pinboard 18mm
	Moss 55mm
Solid Back Panels	Acoustic Felt + Fabric 18mm
	Chipboard + Fabric 18mm
	Chipboard + Melamine, Chipboard + Veneer 18mm
	Plywood 18mm
	Whiteboard 18mm
	Pinboard 18mm
Ceiling	Sandwich element of beech wood and Acoustic PET Felt
Floor	Sandwich element of beech wood
Carpet	Tufted polyamide carpet
Structural Walls	Chipboard panel
Table not included	Pine Plywood Laminated with Antimicrobial and Anti fingerprint HPL Black White

The final product may have slight differences from the versions shown in the photographs.

Lighting	LED
	Energy consumption 7.6W
	Input 12V
	Energy efficiency A+ Light efficiency 156 lm/W
	3000k
	Stand-by mode after 2 min. of no occupation/ no motion
Ventilation	Air flow rate 115m3/h per fan - 4 fans
	Air exchange in 82s (obtained at 100% fan speed)
	Operating voltage 12 V
	Air Ionizer and particle filter
	Max. power 6.2W
	Stand-by mode after 15 min. of no occupation/ no motion
	Adjustable fan speed levels: 60% 75% 100%
Power	Main supply 110 - 240V 50/ 60Hz
	Power plug for EU (UK USA AU on request)
	Energy consumption 14W
	Stand-by consumption 1.6W
Output	2 x Power socket - 230V, 50Hz, max 10A
	2 x USB Type A charger
	2 x CAT6 Ethernet socket
Specifications	Sound insulation (in testing)
	Acoustic absorption Class (in testing)
	Lighting and Ventilation run by motion sensor
	Wheels for easy placement
	Floor adjuster legs for leveling
	Exchangeable Exterior and Interior Panels
	Installation time 65 min. with 3 people
Elevator Dimensions	Elements can fit into an elevator for 8 people
	W 1100 D 1400 H 2200-3000
	WD 800 HD 2200-2400
Metal parts	Antimicrobial powder coated paint Satin Black Satin Whit
Warranty	5 Years (2 years for electrical components)

* Road transport / Maritime transport





DESCRIPTION

K2 is perfect for small meetings or important private conversations without disturbing others in the office and vice versa.

Exterior dimensions W 2200/2275 | D 1000 | H 2300 Interior dimensions W 2066 | D 976 | H 2020

INTERIOR PANELS

Exchangeable Interior Panels 12 mm thick Acoustic PET Felt Interior Panels finishes Uncovered Acoustic PET Felt Dark grey Acoustic PET Felt Dark grey covered in textile

EXTERIOR PANELS

Exchangeable Exterior Panels
18 mm thick panels with strait edges
55 mm thick panels with round edges

Exterior Panels segments
Split (Up + Down) or Full panel option

With Split option you can combine colors Split option helps you to carry the panels easily in a small elevator

Exterior Panels finishes
Textile, Melamine, Veneer, Plywood, Cork Pinboard, HPL Whiteboard, Moss

SOLID BACK PANELS

Exchangeable Exterior Panels
18 mm thick panels with straight edges

Exterior Panels segments
Split (Up + Down) or Full panel option

With Split option you can combine colors Split option helps you to carry the panels easily in a small elevator

Exterior Panels finishes
Textile, Melamine, Veneer, Plywood, Cork Pinboard, HPL Whiteboard.

Reversible opening Left & Right (indication of door opening direction not necessary) Laminated tempered glass 12mm (with silent foils inside)

Magnetic closing door system

Door handle coated with antimicrobial paint

BACK GLASS WALL

LIGHTING

LED ceiling light run by motion sensor

VENTILATION

4 Fans activated by motion sensor Air exchange in 82s (obtained at 100% fan speed)
Air particle filter and air ionizer (against viruses) Stand-by mode, after 15 min. no occupation Adjustable fan speed levels: 60% | 75% | 100% Acoustical noise with L.N.A. - 19.2dB(A) per fan

POWER CONNECTION

Main supply 110 - 240V 50/ 60Hz Power plug for EU (UK | USA | AU on request)

POWER OUTPUT

2 Power sockets - 230V, 50Hz, max 10A 2 USB Type A chargers 2 CAT6 Ethernet sockets

METAL PARTS

Antimicrobial powder coated paint - Satin Black | Satin White finish

TABLE optional Pine Plywood Laminated with Antimicrobial and Anti fingerprint HPL Black | White

SPECIFICATIONS Wheels for easy placement Floor adjuster legs for leveling Exchangeable Exterior and Interior Panels

CARPET

Full covered floor with sound-absorbing polyamide carpet

ACOUSTICAL PERFORMANCE

ELEVATOR

Elements can fit into an elevator for 8 people W 1100 | D 1400 | H 2200-3000 Door W 800 | H 2200-2400

INSTALLATION

Installation time 65 min. with 3 people

The final product may have slight differences from the versions shown in the photographs.





Showroom: Unit 1,2 & 3 25 Britton Street, Clerkenwell, London. EC1M 5NY

Tel: 020 7708 1788